



HOW TO

ADAPTER STRAP: SET-UP



STEP 1 / 9



THE ADAPTER STRAP CONSISTS OF:
webbing strap including buckle / plastic disc including soft padding / 6 Philips-head screws incl. washers
ATTENTION: for use on inflatable boards ONLY! Do NOT use the ADAPTER STRAP on hard-shell boards as the webbing tension might indent the rail.

STEP 2 / 9



1. ASSEMBLY:
Remove the big center screw from the base which comes with your iRIG.

STEP 3 / 9



Now take the loose end of the webbing strap and thread it through the first slot in the base as indicated by the arrow (direction top - down) and...

STEP 4 / 9



...thread it back up through the second slot.

ATTENTION: The ADAPTER STRAP

1. is **not** made for planing conditions, means can be used up to a wind strength of max. 8 knots.
2. works **only** in combination with the iRIG (traditional Windsurf rigs are too heavy).
3. needs to be positioned **behind** the widest point of the board.

STEP 5 / 9



Position the base so that the distance to the buckle is approx. 25-30cm (depending on the width of your board).

STEP 6 / 9




Now turn the base upside down, take a Philips-head screw-driver and fix the webbing to the base with 2 screws and washers.

STEP 7 / 9



Now take the plastic disc and connect it to the base using the other 4 screws and washers. Attention: make sure the soft padded side faces to the outside.

STEP 8 / 9

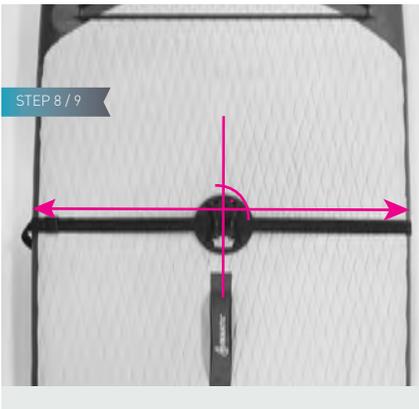

2. ATTACHMENT TO THE BOARD:
Strap the Adapter Strap to the board. The ADAPTER STRAP should be positioned at the widest part of the board. Make sure the base sits in the middle of the board and the webbing is perpendicular to the center.

STEP 9 / 9



Make sure to tension the webbing as hard as you can to ensure a proper fitting to the board.